

MICROBEAD CAR COVERS LIMITED LIFETIME WARRANTY*

To register your car cover for warranty, please complete the Warranty Registration Card on the other side, then email, fax or detach card, affix sufficient US postage and mail.

***LIFETIME REPLACEMENT WARRANTY** on Microbead Car Covers' Select-Fit, Select-Fleece and Top Cover products purchased from Microbead Car Covers, microbeadcarcovers.com and/or MrZAccessories.com in the continental USA excluding Alaska, Hawaii and USVI. Microbead warranties our covers to the original purchaser and original vehicle (VIN#) that should this car cover be proven defective in materials or workmanship, such defects will be repaired or replaced by Microbead without charge. Limit three replacements per registered cover and VIN#. This warranty does not extend to damage through alteration, misuse, hot or sharp exhaust pipes, fire, collision or extreme natural disasters. 4-year warranty on Microbead Car Covers Custom-Fit product.

To obtain repair or replacement, send defective car cover and enclose \$9.95 for shipping and handling† to Microbead Car Covers, along with your sales receipt or legible photo copy. †(No C.O.D. packages will be accepted.)

MICROBEAD CAR COVERS

1 Chestnut Street, Suite 222
Nashua, NH 03060 USA
Phone: 888-627-1129
Fax: 302-397-2929
www.microbeadcarcovers.com
info@microbeadcarcovers.com

MICROBEAD CAR COVERS

From:

POSTAGE
REQUIRED

To:
Warranty Registration
Microbead Car Covers
1 Chestnut Street, Suite 222
Nashua, NH 03060
USA

MICROBEAD CAR COVERS

INSTALLATION & CARE GUIDE



MICROBEAD CAR COVERS

888-627-1129

www.microbeadcarcovers.com





Email: info@microbeadcarcovers.com

Text: 617-657-4212

Watch our YouTube video at: <http://tinyurl.com/p5awak3>


INSTALLING COVER:

1. Unscrew/take off any antennae or roof rack and accessories from the top of your vehicle.
2. Place the folded cover on the top of the vehicle and unfold toward the front and rear of the car.
3. Unfold the cover toward the sides of the car. Fit one mirror pocket over one of the side mirrors, then the other mirror.
4. Bring the sewn, elastic edge under the front bumper.
NOTE: THE TWO HORIZONTAL, REFLECTIVE STRIPES INDICATE THE FRONT OF THE CAR COVER.
5. Then bring the sewn, elastic edge under the rear bumper, completely covering the vehicle. **NOTE: THE VERTICAL REFLECTORS INDICATE THE REAR OF THE COVER. ALWAYS AVOID CONTACT WITH SHARP EDGED AND/OR HOT EXHAUST PIPES AS THE COVER MATERIAL CAN TEAR OR MELT ON THE TIPS. TAIL PIPE-INFLICTED DAMAGE IS NOT COVERED UNDER WARRANTY.**
6. Secure cover using any adjustment straps and/or lock provided by attaching them across the width of the car.

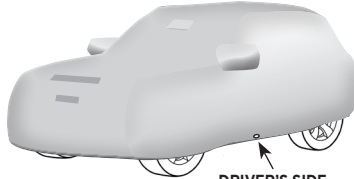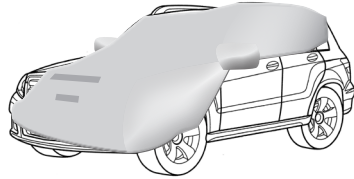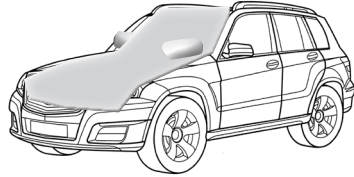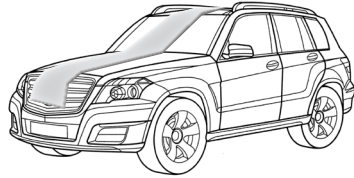

INSTALLING GROMMET FOR ANTENNA:

Place the cover on the vehicle except where the antenna is located. (Do not attempt to place the cover over the top of the antenna.) Center the cover, align both seams with the roof and pull down evenly over the front and rear bumpers. Carefully unfold the cover next to the antenna. Recheck the positioning of the cover to be certain it has not moved. Make sure the cover lies flat over the hood and roof areas. Mark the location of the antenna base with a Sharpie® marker. No need to make a hole at this time. Use the male and female grommet pieces to place on each side of the fabric with the marked dot in the center of the circle. Snap the grommet rings together so that the marked dot is in the center of the ring. Make a small cut in the fabric in the middle of the grommet ring. Add your antenna back on the vehicle and use this grommet to put over the antenna when covering the car in the future.

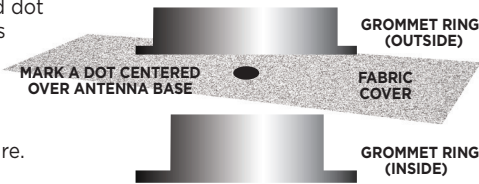

INSTALLING LOCK AND CABLE

Insert small cable end loop **A** through the lock grommet on the cover's driver's side (indicated above). Then loop **A** through loop **B**. Attach the lock to loop **A**, then throw the lock and cable under the car towards the passenger's side of the vehicle. Move to the passenger's side, remove the lock from loop **A** and insert the cable through the passenger's side grommet. Re-attach the lock on the outside of the grommet and test it to make sure that it is closed and in the locked position. Store your keys in a safe place. Enjoy knowing that your cover is securely locked.



REMOVING COVER:

Removing the cover is basically the reverse of the installation

1. Release the back and front elastic hems, any adjustment straps and then mirror pockets
2. Lift the sides and fold them up towards the top, along the entire length of the vehicle, to the approximate height of the bag
3. Roll the cover tightly from the back of the vehicle to the front
4. Store the car cover in the provided drawstring bag

NOTE: IF YOU CONSISTENTLY ROLL UP THE COVER FROM BACK TO FRONT, YOU CAN SAVE TIME ON THE NEXT USAGE BY PLACING THE COVER ON THE HOOD AND UNROLLING IT TOWARDS THE BACK, COVERING THE CAR.

CLEANING COVER:

It is important to keep your cover clean. Overtime, your cover will become soiled from the elements. We recommend the following two procedures to adequately clean the fabric without causing damage.

1. Install the cover over the vehicle. Starting from the top, thoroughly hose off the entire outside of the cover. Remove the cover and place it back on the vehicle inside out. Starting from the top, hose off the entire inside of the cover. Shake out excess water and allow the cover to air dry before using or storing. **DO NOT** machine dry this cover!
2. A really soiled cover can be washed in a large capacity commercial washing machine (available at a local Laundromat). Wash in COLD water only, using a modest amount of mild liquid cleaner. **DO NOT** use fabric softener. Shake out excess water and allow cover to air dry before using or storing. **DO NOT** machine dry this cover!

IMPORTANT POINTS CONCERNING USE OF THIS COVER:

- This cover is designed to avoid moisture damage to your vehicle finish. It is not designed to be waterproof in rainy conditions, but breathable to allow escape of evaporating moisture and heat
- **DO NOT** cover a wet vehicle
- **DO NOT** cover a vehicle which has been repainted within the last three months. Microbead Car Covers cannot be held liable for paint damage
- If wind is excessive and the cover is flapping violently, remove it
- If your cover and vehicle are wet and the temperature drops below 32°F, the cover may freeze to the vehicle. If this happens, pour hot water on the ice and carefully remove the cover
- **DO NOT** store a rolled wet cover for more than 24 hours as mildew may occur. Unfold the wet cover completely and allow it to air dry
- Remove all antennae and roof racks or rack accessories that might damage the cover
- Remove car covers during extreme weather and natural disasters
- **DO NOT** use car covers on vehicle when in tow

MICROBEAD CAR COVERS

WARRANTY REGISTRATION CARD

FIRST _____ LAST _____

ADDRESS _____ APT _____

CITY _____ ST _____ ZIP _____

PHONE _____ EMAIL _____

YEAR _____ MAKE _____ MODEL _____

LAST 4 OF VIN # _____ PURCHASED FROM _____

HOW DO YOU USE YOUR COVER? INDOORS OUTDOORS BOTH

FEEDBACK/COMMENTS _____
